

Model	POE-60W	
Rated working voltage	100-240Vac/50-60	
Output power(Max.)	DC+POE≤60W	
Output	Each DC interface	POE interface
Output voltage(selectable)	9V/12Vdc	15V/24Vdc
Output polarity	— —⊕— +	+4,5pins -7,8pins
Output power & current	Single DC port max output 9V 1A, 12V1.5/3A	1.0A/24W
QTY. & capacity of battery	18650 lithium battery 2200mAh*8	
Unit dimension(mm)	202*253*50mm	
Net weight(kg)	1.76kg	
Storage temperature	-45℃ ~ -20℃	
Operating temperature	0℃ ~ 45℃	

DC MULTI OUTPUT

DC output 12V*8 and 9V*2 selectable

8 pieces of 12V DC and 2pieces of 9V DC output ports can supply power for multiple devices at the same time.

POE output 15V/24V selectable



INTELLIGENT BACKUP BATTERY



17600mAh

High capacity lithium batteries provide long backup time to equipments.




LCD INTELLIGENT DISPLAY

LCD display provides real-time data for checking status of the devices.



PRODUCT SIZE

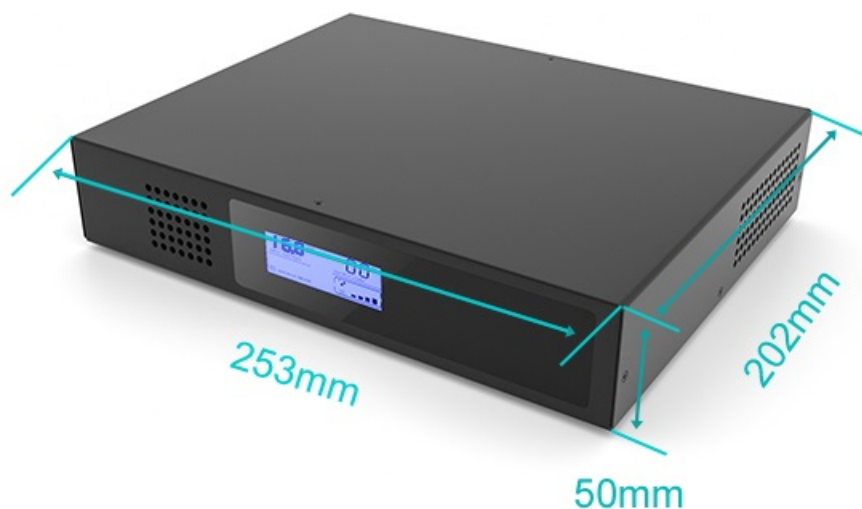

PACKAGE DETAILS



POE-60W



User's manual



Warranty card



AC power cable



DC output cable

MULTIPLE PROTECTION

A variety of protection, protect the normal operation of equipment, safe and assured



Over charging & Over discharging protection




Electric leakage protection





Input and Output Overvoltage Protection



Short circuit protection

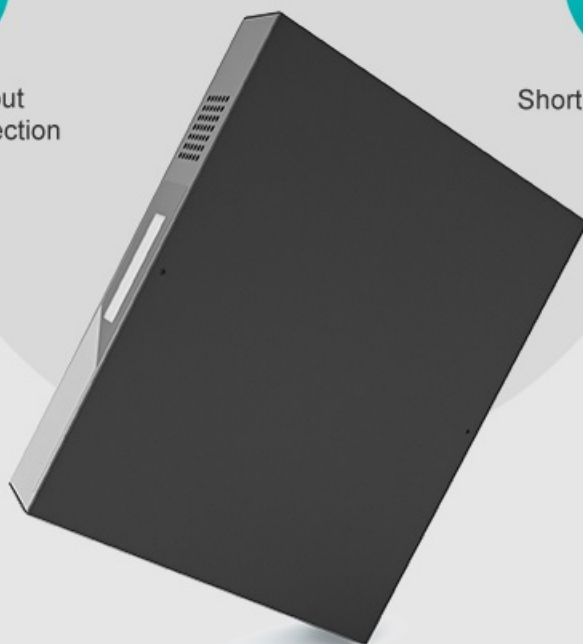

INSTRUCTIONS OF THE COMPONENTS

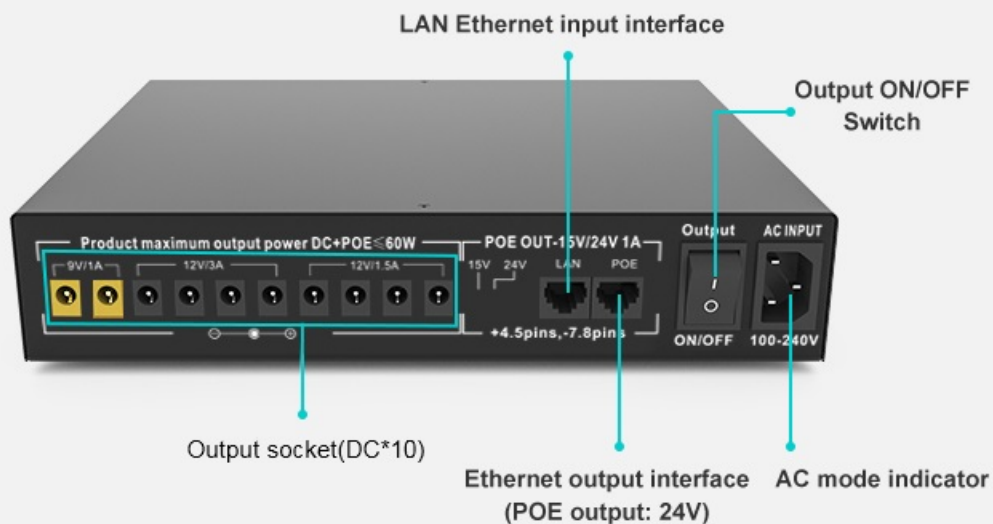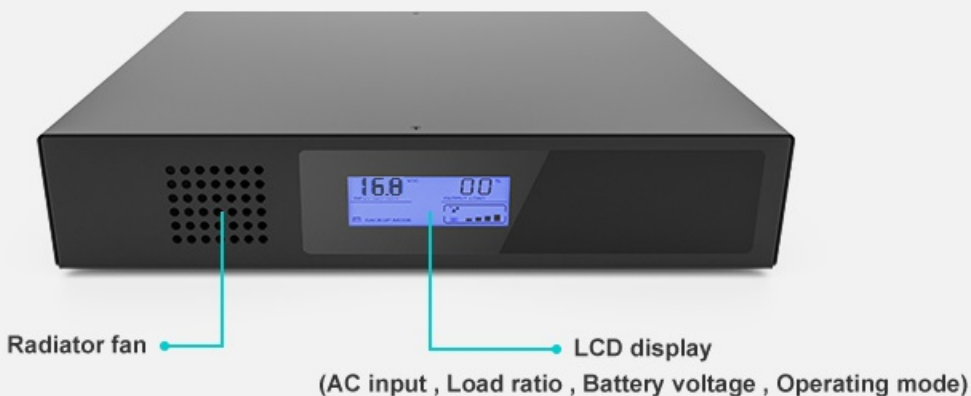

MINI DC UPS

POE-60W

LCD Display / DC output *10 / 17600mAh battery



COMPATIBLE DEVICE



CCTV



LED Light



Camera



Smart Devices



Router

EFFICIENT HEAT DISSIPATION

Full metal case, independent heat dissipation holes provides high cooling efficiency.

